COCKERILL® 3030




Qualified In Production Delivered



johncockerill.com/defense

COCKERILL® 3030

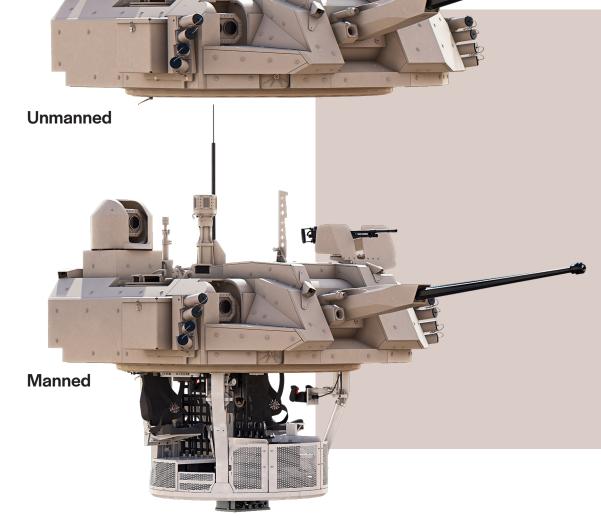

Technical Specification

Vehicle Integration	Tracked or wheeled 6x6 or 8x8 chassis
Turret	Welded ballistic aluminium
Crew	2
Main armament	Mk44, MK44S, XM813 Single shot – 5 round burst – full auto 255 30x173mm rounds in two-drum feed system «Super 40» option with Mk44S
Secondary armament	7.62 mm co-ax or pintle mount (7.62mm, 12.7 mm, 40mm AGL) Rockets launcher
Ammunition loading	External and under armour
Anti-tank capability	Turret launched AT systems
Protection	8 smoke grenade launchers APS, Acoustic Gunshot Detection, LWD
Sights	Identical Commander/Gunner Sights (Hunter/ Killer) Dual axis stabilized Day/night
External cameras	360° cover
Elevation	-10° / +60°
D/R/I	Day: 18 / 9 / 5 km Thermal imager: 15 / 7 / 3.5 km
Ballistic protection	Up to level 5 STANAG 4569

defense@johncockerill.com